


Data sheet - M10-41 R SK ST

FASTEKS FILKO® - blind rivet nuts countersunk head 90° / knurled shank / open

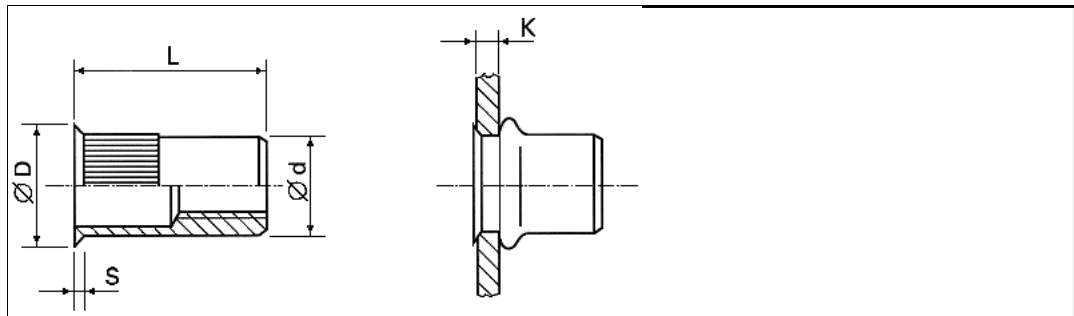

3D-Data available	
Order description	M10-41 R SK ST
Thread	M10
Grip range K	1.5-4.0 mm
Mounting hole-Ø +0,1	13.0 mm
Ø d	13.0 mm
Ø D	15.5 mm
S	1.6 mm
L	22.0 mm
Material	Steel Surface protection: Galvanized with thick coating passivation (RoHS compliant)
Hint	Countersinking of the drilled hole is necessary
	Other dimensions and materials on request

uniform resource locator: