


## Data sheet - BS-M3-2

### Blind self-clinching nuts

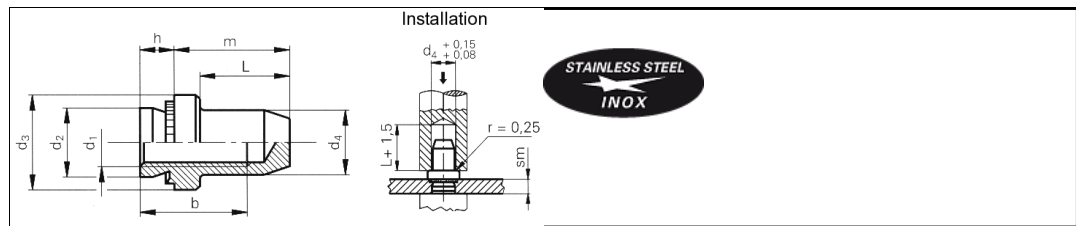

|                                          |                                                       |
|------------------------------------------|-------------------------------------------------------|
| 3D-Data available                        |                                                       |
| Order description                        | BS-M3-2                                               |
| Thread d1                                | M3                                                    |
| Hole-Ø in the sheet<br>+0.08<br>0        | 4.25 mm                                               |
| Max. d2                                  | 4.20 mm                                               |
| d3 ±0.25                                 | 6.35 mm                                               |
| Max. d4                                  | 3.84 mm                                               |
| Min. b                                   | 5.3 mm                                                |
| Max. L                                   | 8.5 mm                                                |
| m ±0.25                                  | 9.6 mm                                                |
| Max. h                                   | 1.38 mm                                               |
| Min. sm                                  | 1.4 mm                                                |
| Min. edge distance up to the hole centre | 4.8 mm                                                |
| Material                                 | Passivated grade 18/8 stainless steel (AISI 300).     |
| Use                                      | For sheet hardnesses up to HRB 70.                    |
| Information                              | Closed thread end protects against contamination etc. |
| Tools                                    |                                                       |
| Insertion machines                       |                                                       |

uniform resource locator: